TOYOTOMI

User's manual

WALL MOUNTED AIR CONDITIONER INVERTER TYPE

MODELS
CTN/CTG-328W
CTN/CTG-335W
CTN/CTG-356W
CTN/CTG-371W
CTN/CTG-328BRM
CTN/CTG-335BRM
CTN/CTG-356BRM
CTN/CTG-371BRM
CTN/CTG-328BV
CTN/CTG-335BV
CTN/CTG-356BV
CTN/CTG-371BV

Thank you for purchasing our product.
Before using this product, be sure to read this instruction manual to ensure proper usage. Please keep this manual for later reference. Improper use of this product may result in a malfunction, failure, unexpected accident, or create a potential hazard.

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a persen responsible for their safety.Children should be supervised to ensure that they do not play with the appliance.



This marking indicates that this product should not be disposed with other house hold wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

R32: 675

Explanation of Symbols

WARNING This symbol indicates the possibility of death or serious injury.

CAUTION This symbol indicates the possibility of injury or damage to property.

NOTE Indicates important but not hazard-related information, used to indicate risk of property damage.

Exception Causes

Manufacturer will bear no responsibilities when personal injury or property loss is caused by the following reasons.

1. Damage the product due to improper use or misuse of the product.
2. Alter, change, maintain or use the product with other equipment without abiding by the instruction manual of manufacturer.
3. After verification, the defect of product is directly caused by corrosive gas.
4. After verification, the defects are due to improper operation during transportation of product.
5. Operate, repair, maintain the unit without abiding by instruction manual or related regulations.
6. After verification, the problem or dispute is caused by the quality specification or performance of parts and components that produced by other manufacturers.
7. The damage is caused by natural calamities, bad using environment or force majeure.

If it needs to install, move or maintain the air conditioner, please contact dealer or local service center to conduct it at first. Air conditioner must be installed, moved or maintained by appointed unit. Otherwise, it may cause serious damage or personal injury or death. When refrigerant leaks or requires discharge during installation, maintenance, or disassembly, it should be handled by certified professionals or otherwise in compliance with local laws and regulations. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.

The Refrigerant

Appliance filled with flammable gas R32.

Before use the appliance, read the owner's manual first.

Before install the appliance, read the installation manual first.

Before repair the appliance, read the service manual first.

To realize the function of the air conditioner unit, a special refrigerant circulates in the system. The used refrigerant is the fluoride R32, which is specially cleaned. The refrigerant is flammable and inodorous. Furthermore, it can lead to explosion under certain conditions. But the flammability of the refrigerant is very low. It can be ignited only by fire.
Compared to common refrigerants, R32 is a nonpolluting refrigerant with no harm to the ozonosphere. The influence upon the reenhouse effect is also lower. R32 has got very good thermodynamic features which lead to high energy efficiency. The units therefore need a less filling.

WARNING:
DO NOT use means to accelerate the defrosting process or to clean, other than those recommended by the manufacture. Should repair be necessary, contact your nearest authorized Service Center. Any repairs carried out by unqualified personnel may be dangerous. The appliance shall be stored in a room without continuously operating ignition sources. (for example: open flames, an operating gas appliance or an operating electric heater.) DO NOT pierce or burn.
Appliance shall be installed, operated and stored in a room with a floor area larger than 4m².
Appliance filled with flammable gas R32. For repairs, strictly follow manufacturer's instructions only. Be aware that refrigerants not contain odor. Read specialist's manual.



This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.

1) Frequency band(s) in which the radio equipment operates
   2400MHz-2483.5MHz
2) Maximum radio-frequency power transmitted in the frequency band(s) in which the radio equipment operates: 20dBm

Safety precautions

⚠ WARNING

Installation

- Installation or maintenance must be performed by qualified professionals. Otherwise, it may cause personal injury or damage.
- The appliance shall be installed in accordance with national wiring regulations.
- Installation must be performed in accordance with the requirement of NEC and CEC by authorized personnel only.
- Must follow the electric safety regulations when installing the unit.
- According to the local safety regulations, use qualified power supply circuit and circuit breaker.
- All wires of indoor unit and outdoor unit should be connected by a professional
- Unstable power supply or incorrect wiring may result in electric shock, fire hazard or malfunction. Please install proper power supply cables before using the air conditioner.

- The grounding resistance should comply with national electric safety regulations
- Air Conditioner should be properly grounded. Incorrect grounding may cause electric shock
- Do not put through the power before finishing installation.
- Do install the circuit breaker. If not, it may cause malfunction.
- An all-pole disconnection switch having a contact separation of at least 3mm in all poles should be connected in fixed wiring
- Including a circuit break with suitable capacity, please note the following table. Air switch should be included magnet buckleand heating buckle function, it can protect the circuit-short and overload.
- Circuit breaker should be included magnet buckle and heating buckle function. It can protect the overload and circuit short.

⚠ CAUTION

Installation

- Instructions for installation and use of this product are provided by the manufacturer.
- Select a location which is out of reach for children and far away from animals or plants. If it is unavoidable, please add the fence for safety purpose.
- The indoor unit should be installed close to the wall.
- Don’t use unqualified power cord.
- If the length of power connection wire is insufficient, please contact the supplier for a new one. Avoid extending the wire by yourself.
- The appliance must be positioned so that the plug is accessible.
- For the air conditioner with plug, the plug should be reachable after finishing installation.

- For the air conditioner without plug, a circuit breaker must beinstalled in the line.
- If you need to relocate the air conditioner to another place, only the qualified person can perform the work. Otherwise, it may cause personal injury or damage.
- Properly connect the live wire, neutral wire and grounding wire of power socket.
- The yellow-green wire in air conditioner is grounding wire, which can't be used for other purposes
- Be sure to cut off the power supply before proceeding any work related to electricity and safety.
- Do not put through the power before finishing installation.
- The air conditioner is the first class electric appliance. It must be properly grounder with specialized grounding device by a professional. Please make sure it is always grounded effectively, otherwise it may cause electric shock.
- The temperature of refrigerant circuit will be high, please keep the interconnection cable away from the copper tube.

⚠ WARNING

Operation and Maintenance

- This appliance can be used by children aged from 8years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.
- Children shall not play with the appliance.
- Cleaning and user maintenance shall not be made by children without supervision.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.

- DO NOT connect air conditioner to multi-purpose socket. Otherwise, it may cause fire hazard.
- Always disconnect power supply when cleaning air conditioner. Otherwise, it may cause electric shock.
- DO NOT wash the air conditioner with water to avoid electric shock.
- DO NOT spray water on indoor unit. It may cause electric shock or malfunction.
- After removing the filter, do not touch the fins to avoid injury.
- Do not extend fingers or objects into air inlet or air outlet. It may cause personal injury or damage.
- Do not spill water on the remote controller, otherwise the remote controller may be broken.
- DO NOT use fire or hair dryer to dry the filter to avoid deformation or fire hazard.
- DO NOT block air outlet or air inlet. It may cause malfunction.
- DO NOT step on top panel of outdoor unit, or put heavy objects. It may cause damage or personal injury.
- Do not repair air conditioner by yourself. It may cause electric shock or damage. Please contact dealer when you need to repair air conditioner.
- When below phenomenon occurs, please turn off air conditioner and disconnect power immediately and then contact the dealer or qualified professionals for service.
- Power cord is overheating or damaged.
- There’s abnormal sound during operation.
- Circuit break trips off frequently.
- Air conditioner gives off burning smell.
- Indoor unit is leaking
- If the air conditioner operates under abnormal conditions, it may cause malfunction electric shock or fire hazard.
- When turning on or turning off the unit by emergency operation switch, please press this switch with an insulating object other than metal.

UV-C lamp function instruction

⚠ WARNING

This appliance contains a UV emitter. Do not stare at the light source.

- This appliance contains a UV-C lamp
- Read the maintenance instructions before opening the appliance.
- Details for cleaning and other user maintenance of the appliance:

1. Prior to cleaning or other maintenance, the appliance must be disconnected from the supply mains.
2. Open the panel to take out the filter.
3. Use a soft dry cotton cloth to wipe, carefully, gently with no pressure, the quartz glass until it's clean.
4. Reinstall the filter when it has been cleaned and then close the panel cover.

- The method, frequency of cleaning, and necessary precautions to be taken: Cleaning method: wipe the quartz glass with soft dry cloth, carefully, gently, with no pressure until the surface is clean. Cleaning frequency: clean it every 6 months; the cleaning frequency can be properly adjusted according to the degree of air cleanliness. Preventive measures:

1. The unit must be turned off and the power must be cut off before cleaning. Otherwise, it may cause electric shock and damage by UV.
2. Do not use volatile oil, alcohol, diluents or lacquer to clean the UV-C lamp. Otherwise, the UV-C lamp may be damaged.
3. Do not touch the fins of indoor unit to prevent scalding.
4. Do not scratch the surface of glass when wiping it.

- Unintended use of the appliance or damage to the housing may result in the escape of dangerous UV-C radiation.
- CAYTION UV-C radiation may, even in small doses, cause harm to the eyes and skin.
- Appliances that are obviously damaged must not be operated.
- Before opening doors and access panels bearing the ultraviolet radiation hazard Symbol for the conducting user maintenance, it is recommended to disconnect the power.
- UV-C barriers bearing the ultraviolet radiation hazard symbol should not be removed.
- Do not operate UV-C lamps outside of the appliance.

⚠ WARNING

Do not operate the UV-C emitter when it is removed from the appliance.

- To avoid any dangerous situations, the user shall not replace the UV-C lamp, which must be performed by professional service.

NOTE:

Clean and Maintenance of the UV-C lamps is suggested, to be performed by an authorised experienced technician.

Working temperature range

NOTE

	Indoor Side DB/WB (ºC)	Outdoor Side DB/WB (ºC)
Maximum Cooling	32/23	50/26
Maximum Heating	27/-	30/18

NOTE:

- The operating temperature range (outdoor temperature) for Lowtemperature cooling only unit is -15°C ~50°C.

PARTS NAME

indoor unit

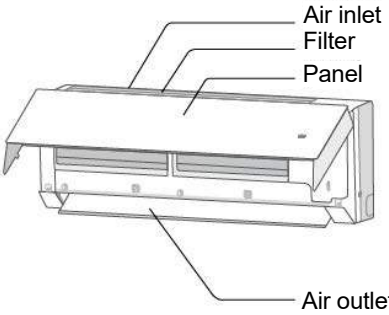

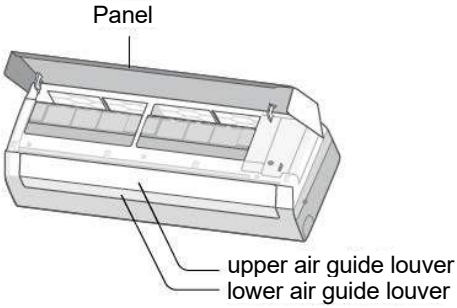

Remote Controller

Display

Heat mode	
Cool mode	
Dry mode	
Temp. indicator	26
Power indicator	
Humidity indicator	%

outdoor unit

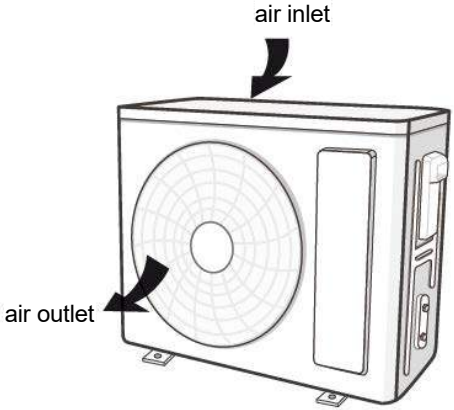

Actual product may be different from above graphics, please refer to actual products.

Operation and introduction of remote controller

Buttons On remote Controller

Introductions For Icons on Display Screen

		Quiet
	FAN AUTO	Set fan speed
		Turbo mode
		Send signal
Operation mode		Auto mode
		Cool mode
		Dry mode
		Fan mode
		Heat mode
		Auto Clean X-FAN
		Humidity control
		Power limiting operation
		Set temperature
		Indoor ambient temp.
		Indoor ambient humidity
	88:88	Set time
	ONOFF	TIMER ON / TIMER OFF
		Left & right swing
		Up & down swing
		Child lock
		Fast cool
		Health and UVC functions
	WIFI	WiFi function
		LED
		Auto LED
		I SENSE
		Sleep mode

Introduction for icons on display screen

NOTE

- This is a general use remote controller, it could be used for the airconditioners with multifunction; For some function, which the model doesnot have, if press the corresponding button on the remote controller that the unit will keep the original running status.
- After putting through the power, the air conditioner will give out a sound. Operation indictor ⏻ is ON. After that, you can operate the air conditioner by using remote controller.
- Under on status, pressing the button on the remote controller, the signal icon on the display of remote controller will blink once and the airconditioner will give out a “de” sound, which means the signal has been sent to the air conditioner.

1. ON/OFF button

Press this button to turn on the unit. Press this button again to turn off the unit.

2. MODE button

Press this button to select your required operation mode.



- When selecting auto mode, air conditioner will operate automatically according to the sensed temperature. Press «FAN» button can adjust fan speed. Press «/» button can adjust fan blowing angle.
- After selecting cool mode, air conditioner will operate under cool mode. Press « + » or « - » button to adjust set temperature. Press «FAN» button to adjust fan speed. Press «/» button to adjust fan blowing angle.
- When selecting dry mode, the air conditioner operates at low speed under dry mode. Under dry mode, fan speed can’t be adjusted. Press «/» button to adjust fan blowing angle.
- When selecting fan mode, the air conditioner will only blow fan, no cooling and no heating. Press «FAN» button to adjust fan speed. Press «/» button to adjust fan blowing angle.
- When selecting heat mode, the air conditioner operates under heat mode. Press « + » or « - » button to adjust set temperature. Press «FAN» button to adjust fan speed. Press « /» button to adjust fan blowing angle.

NOTE

- For preventing cold air, after starting up heat mode, indoor unit will delay 1~5 minutes to blow air (Actual delay time depends on indoor ambient temperature).
- Set temperature range from remote controller: 16~30°C (61-86°C).
- Cooling only unit won’t receive heat mode signal. If setting heat mode with remote controller, press « ON/OFF « button can’t start up the unit.

FAN button

This button is used for setting Fan Speed in the sequence that goes from AUTO, , , , , , to then back to Auto.



Low speed Low-Medium speed Medium speed Medium-High speed High speed Turbo speed Quiet speed

NOTE

- It's low fan speed under dry mode.
- Auto Clean (X-FAN) function: Hold fan speed button for 2s in cool or dry mode, the icon « » is displayed and the in-door fan will continue operation for a few minutes in order to dry the indoor unit even though you have turned off the unit. After energization, Auto Clean (X-FAN) OFF is defaulted. Auto Clean (X-FAN) is not available in auto, fan or heat mode. This function indicates that moisture on evaporator of indoor unit will be blowed after the unit is stopped to avoid mould. Having set Auto Clean (X-FAN) function on: After turning off the unit by pressing « ON/OFF « button indoor fan will continue running for a few minutes. at low speed. In this period, Hold fan speed button for 2s to stop indoor fan directly. Having set Auto Clean (X-FAN) function off: After turning off the unit by pressing «ON/OFF» button, the complete unit will be off directly.

+/- buttons

Press « + » or « - » button once increase or decrease set temperature 1°C(°F). Holding « + » or « - » button, 2s later, set temperature on remote controller will change quickly. On releasing button after setting is finished, temperature indicator on indoor unit will change accordingly. The temperature cannot be adjusted in AUTO mode.

UD-swing button

Press this button can select up & down swing angle. Fan blow angle can be selected circularly as below:



No display (horizontal louvers stops at current position)

When selecting «», air conditioner is blowing fan automatically. Horizontal louver will automatically swing up & down at maximum angle. When selecting « », air conditioner is blowing fan at fixed position. Horizontal louver will stop at the fixed position. Hold «» button above 2s to set your required swing angle. When reaching your required angle, release the button.

NOTE

Press this button continuously more than 2s, the main unit will swing back and forth from up to down, and then loosen the button, the unit will stop swinging and present position of guide louver will be kept immediately. Under swing up and down mode, when the status is switched from off to «» , if press this button again 2s later, «» status will switch to off status directly; if press this button again within 2s, the change of swing status will also depend on the circulation sequence stated above.

Humidity button

Under “Cooling mode”:

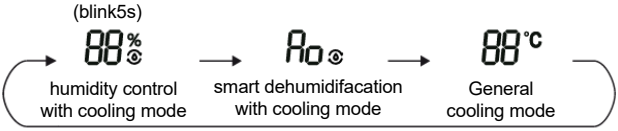

By pressing the «Humidity Control» button «» on remote controller once, the unit will enter into «Manual Dehumidifi cation» mode. Both humidity (40~80%) and temperature can be adjusted independently. (Setting method: increase by 5% from 40%-80%, and adjust by pressing «+» and «-» buttons). Under this dehumidifi cation mode, set humidity will appear fi rst for 5s and then set temperature. By pressing «Humidity Control» button on remote controller twice, the unit will enter into «Smart Dehumidifi cation» mode, working at optimal comfortable humidity range under different temperatures according to the pre-set program. Under this dehumidifi cation mode, «» icon will appear on remote controller and «AO» appears on the display of indoor units for 5s. Humidity control is not adjustable while temperature is. Under «Dry Mode»:



By pressing «Humidity Control» button «» on remote controller once, the unit will enter into «Manual Dehumidifi cation» mode. Both humidity (30~70%) and temperature can be set independently. (Setting method: increase by 5% from 30%-70%, and adjust by pressing «+» and «-» buttons). Humidity is adjustable while temperature is not. Under this dehumidifi cation mode, set humidity will appear. By pressing «Humidity Control» button «» on remote controller twice, the unit will enter into «Continuous Dehumidifi cation» mode, keeping dehumidifi cation until room temperature reach below 16ºC degrees. Under this dehumidifi cation mode, «CO» icon will appear on both remote controller and display of indoor units. Both humidity control and temperature can NOT be adjusted.

NOTE

- The air conditioner is mainly used for controlling the temperature, while the humidity-control is the auxiliary function. The humidity will be affected by the factors such as indoor and outdoor environment, degree of indoor sealing and indoor fl ow.
- When the set humidity is higher than current atmospheric humidity, the set humidity can’t be reached.

LR-swing button

Press this button can select left & right swing angle. Fan blow angle can be selected circularly as below:



NOTE

- Press this button continuously more than 2s, the main unit will swing back and forth from left to right, and then loosen the button, the unit will stop swinging and present position of guide louver will be kept immediately.
- Under swing left and right mode, when the status is switched from off to , if press this button again 2s later, status will switch to off status directly; if press this button again within 2s, the change of swing status will also depend on the circulation sequence stated above.

HEALTH button

Press this button to turn on or turn off the health and UVC functions in operation status.



When selecting « » with remote controller, ION will be turn on.
When selecting « » with remote controller, UVC sterilization function will be turn on.
When selecting « » with remote controller, ION and UVC sterilization function will be turn on together.

TIMER button

- At ON status, press this button once can set TIMER OFF. The character of HOUR and OFF will fl ash. Press «+» or «-» button within 5s can adjust the time of TIMER ON. After each pressing of «+» or «-» button, time will increase or decrease half an hour. When holding «+» or «-» button, 2s later, the time will change quickly until to reach to your required time. After that, press «TIMER» button to confirm it. The character of HOUR and OFF won't flash again. Cancel TIMER OFF: Press «TIMER» button again under TIMER OFF status.
- At OFF status, press this button once can set TIMER ON. Please refer to TIMER off for detailed operation. Cancel TIMER ON: Press «TIMER» button again under TIMER ON status.

NOTE

- Time setting range: 0.5-24 hours.
- Time interval between two operations can't exceed 5s. Otherwise, remote controller will exit the setting status automatically.

LIGHT button
Press this button to control the LED status on the displayer, the circulation change is as follow:

When selecting « » (Auto LED) with remote controller, LED indicator on indoor unit will adjust the luminance automatically according to the ambient intensity of illumination.

SLEEP button
Press this button, can select Sleep 1 ( ), Sleep 2 ( ), Sleep 3 ( ) and cancel the Sleep, circulate between these, after electrifi ed, Sleep Cancel is defaulted. Sleep 1 is Sleep mode 1, in Cool modes; sleep status after run for one hour, the main unit setting temperature will increase 1 , two hours, setting temperature increased 2 , then the unit will run at this setting temperature; In Heat mode: sleep status after run for one hour, the setting temperature will decrease 1 , two hours, setting temperature will decrease 2 , then the unit will run at this setting temperature. Sleep 2 is Sleep mode 2, that is air conditioner will run according to the presetting a group of sleep temperature curve. Sleep 3 the sleep curve setting under Sleep mode by DIY.

(1) Under Sleep 3 mode, press «HEALTH» button for a long time, remote controller enters into user individuation sleep setting status, at this time, the time of remote controller will display «1hour», the setting temperature «88» will display the corresponding temperature of last setting sleep curve and blink (The fi rst entering will display according to the initial curve setting value of original factory).
(2) Adjust « + » and « - » button, could change the corresponding setting temperature, after adjusted, press «HEALTH» button for confirmation.
(3) At this time, 1hour will be automatically increase and ed at the timer position on the remote control, (that are «2hours» or «3hours» or «8hours»), the place of setting temperature «88» will display the corresponding temperature of last setting sleep curve and blink.
(4) Repeat the above step (2)~(3) operation, until 8 hours temperature setting finished, sleep,curve setting finished, at this time, the remote controller will resume the original timer display; temperature display will resume to original setting temperature. Sleep 3 the sleep curve setting under Sleep mode by DIY could be inquired: The user could accord to sleep curve setting method to inquire the presetting sleep curve, enter into user individuation sleep setting status, but do not change the temperature, press «HEALTH» button directly for confirmation. Note: In the above presetting or enquiry procedure, if continuously within 10s, there is no button pressed, the sleep curve setting within 10s, there is no button pressed, the sleep curve setting status will be automatically quit and resume to display the original displaying. In the presetting or enquiry procedure, press «ON/OFF» button, «MODE» button, «TIMER» button or «SLEEP» button, the sleep curve setting or enquiry status will quit similarly.

WiFi button
Press «WiFi» button to turn on WiFi function, «WiFi» icon will be displayed on the remote controller. Hold «WiFi» button for 5s to turn off WiFi function and «WiFi» icon will disappear. Under off status, press «MODE» and «WiFi» buttons simultaneously for 1s, WiFi module will restore factory settings.

Function introduction for combination buttons

Energy-Saving Function
Under cooling mode, press «MODE.» and «TIMER» buttons simultaneously to start up or turn off energy-saving function. When energy-saving function is started up, «SE» will be shown on remote controller, and air conditioner will adjust the set temperature automatically according to ex-factory setting to reach to the best energy-saving effect. Press «MODE» and «TIMER» buttons simultaneously again to exit energysaving function.

NOTE
- Under energy-saving function, fan speed is defaulted at auto speed and it can't be adjusted.
- Under energy-saving function, set temperature can't be adjusted.
- Sleep function and energy-saving function can't operate at the same time. If energy-saving function has been set under cool mode, press «SLEEP» button will cancel energy-saving function. If sleep function has been set under cool mode, start up the energy-saving function will cancel sleep function.

Child Lock Function
Press ''ON/OFF'' and ''-'' buttons simultaneously to turn on or turn off child lock function. When child lock function is on, «» icon is displayed on remote controller. If you operate the remote controller, the «»icon will blink three times without sending signal to the unit.

8°C Heating function
Under heating mode, set temperature to 8°C to turn on 8 °C heating function. The air conditioner keeps the heating status at 8°C.

NOTE
- Under 8°C heating function,fan speed is defaulted at auto speed and it can't be adjusted.

Temperature Display Switchover Function
Under OFF status, press « - « and «MODE» button simultaneously to switch temperature display between °C and °F.

Indoor ambient temperature or humidity display
By holding « On/Off « and «» buttons simultaneously, you can see indoor ambient temperature or indoor ambient humidity on indoor unit's display. The setting on remote controlleris selected circularly as below:



When selecting « » with remote controller, temperature indicator on indoor unit displays indoor ambient temperature.
When selecting « » with remote controller, temperature indicator on indoor unit displays indoor ambient humidity.

NOTE
The ambient humidity value is only for reference. Eg:
If humidity value is «0%», there may be malfunction for the humidity detection board. Please contact local service provider. There may be some measuring deviation for humidity detection and photosensitiveness detection.

Volume Control of IDU Buzzer
Press «MODE» and « » buttons simultaneously to reduce the sound level of the indoor unit' buzzer.

NOTE
- This function is only available for some models.

Fast Cool Function
Press « On/Off « and « + « buttons simultaneously under cooling mode can select 25°C(77°F) fast cooling mode, 16°C(61°F) fast cooling mode and normal cooling mode circularly. «» icon will be displayed on the remote controller under fast cooling mode. Once it enters into fast cooling mode, the fan speed is auto fan and the set temperature is 25°C(77°F) or 16°C(61°F). At this time, the set temperature flashes to display for 5s. In the flashing period, press « + » or « - » button to adjust the set temperature. Press «Fan» button to adjust the fan speed. If the set temperature and the fan speed haven't been adjusted during that time, the remote controller and the indoor unit will operate under current set temperature and fan speed for 20 minutes. 20 minutes later, the set temperature and the fan speed for the remote controller and the indoor unit will turn to the status before quick cooling.

NOTE
- If the set temperature and the fan speed have been adjusted during the operation under fast cooling mode, the unit will exit from the fast cooling mode. Then the indoor unit operates continuously under the adjusted status.
- Fast cooling function is only applicable for some models. If this function is unavailable for this indoor unit, 20 minutes later, the remote controller will turn back to the status before fast cooling. Indoor unit operates continuously according to current status. At this time, status of indoor unit and the display status on the remote controller may be different.
- This function is only available for some models.

Clean Reminder Function of Filter
The reminder function is defaulted to be OFF. Hold « On/Off « and « » buttons simultaneously for 5s to turn it on. Once the reminder function is turned on, when the air conditioner has reached to the set time, the dual-8 nixie tube will fl ash about 30s when the unit is turned on each time to remind the user to clean the filter: you can turn off this cycle reminder by holding « On/Off « and « » buttons simultaneously for 5s and then the air conditioner will count time again.

NOTE
- Once the reminder function is turned on, only this cycle reminder can be cleared.
- This function is only available for some models.

Limited Power Function
Limited Power Function is for limiting power of the whole unit. Press «SLEEP» and «MODE» buttons simultaneously, the remote controller will circularly display as the following:



- Maximum power limited under the mode is lower than that of mode.
- If you want to cancel the power limiting function, press «Mode» and «Sleep» buttons simultaneously till the icon in remote controller is not displayed.
- When the remote controller is turned off, power Limiting function is cancelled. If you want to activate the function, please repress «Mode» and «Sleep» buttons simultaneously.
- If the current power is lower than the maximum power of mode, then the power will not be limited after entering into such mode.
- For the model with one outdoor unit and two indoor units, if any one of indoor units enters into power limiting function, the outdoor unit will enter into the set limiting power mode of indoor unit; when two indoor units enter into power limiting mode, then the power of outdoor unit will be limited according to the lower power of the two indoor units.

NOTE
This button is only available for the model with such function.

SELF CLEAN Function
Under unit off status, hold «Mode» and «» buttons simultaneously for 5s to turn on or turn off the self clean function. During the self clean process of evaporator, the unit will perform fast cooling or fast heating. There may be some noise, which is the sound of fl owing liquid or thermal expansion or cold shrinkage. The air conditioner may blow cool or warm air, which is a normal phenomenon. During cleaning process, please make sure the room is well ventilated to avoid affecting the comfort.

NOTE
The self clean function can only work under normal, ambient temperature. If the room is dusty, clean it once a month; if not, clean it once every three months. After the self clean function is turned on, you can leave the room. When self clean is finished the air conditioner will enter standby status.

Night mode
Under cooling or heating mode, when turning on sleep mode and turn to low speed or quiet notch, the outdoor unit would enter into night mode.

NOTE
- When you feel that the cooling and heating effect is poor, please press «Fan» button to other fan speed or press «Sleep» button to exit the night mode.
- The night mode can only work under normal ambient temperature.
- This function is only available for some models.

I SENSE function
Press «Health» and « + « buttons simultaneously to start I SENSE function and «» will be displayed on the remote controller. After this function is set, the remote controller will send the detected ambient temperature to the controller and the unit will automatically adjust the indoor temperature according to the detected temperature. Press «Health» and « + « buttons simultaneously again to turn off I SENSE function and «» will disappear.
- Please put the remote controller near user when this function is set. Do not put the remote controller near the object of high temperature or low temperature in order to avoid detecting inaccurate ambient temperature.When I SENSE function is turned on, the remote controller should be put within the area where indoor unit can receive the signal sent by the remote controller.

Replacement of batteries in remote controller

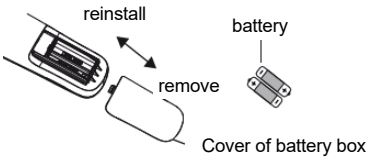

1. Press the back side of remote controlled marked with «OPEN», as shown in the fig, and then push out the cover of battery box along the arrow direction.
2. Replace two 7# (AAA 1.5V) dry batteries, and make sure the position of «+» polar and «-» polar are correct.
3. Reinstall the cover of battery box.

NOTE
- During operation, point the remote control signal sender at the receiving window on indoor unit.
- The distance between signal sender and receiving window should be no more than 8m, and there should be no obstacles between them.
- Signal may be interfered easily in the room where there is fluorescent lamp or wireless

telephone. remote controller should be close to indoor unit during operation.
- Replace new batteries of the same model when replacement is required.
- When you don't use remote controller for a long time, please take out the batteries.
- If the display on remote controller is fuzzy or there's no display, please replace batteries.

Emergency operation

If remote controller is lost or damaged, please use auxiliary button to turn on or turn off the air conditioner. The operation in details are as below:
As shown on the fi g. Open panel, press aux. button to turn on or turn off the air conditioner. When the air conditioner is turned on, it will operate under auto mode.

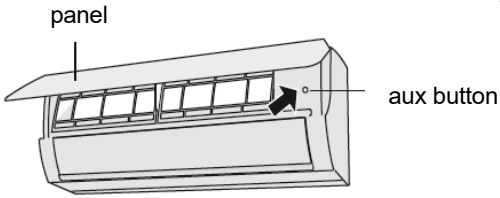

WARNING

Use insulated object to press the auto button.

Clean and maintenance

WARNING

- Turn off the air conditioner and disconnect the power before cleaning the air conditioner to avoid electric shock.
- DO NOT wash the air conditioner with water to avoid electric shock.
- DO NOT use volatile liquid to clean the air conditioner.
- Do not use liquid or corrosive detergent to clean the appliance and do not splash water or other liquid onto it , otherwise, it may damage the plastic components , even cause electric shock.

Clean surface of indoor unit

When the surface of indoor unit is dirty, it is recommended to use a soft dry cloth or wet cloth to wipe it.

NOTE:

- Do not remove the panel when cleaning it.

Clean filter

1. Remove filter

Press the spring fasteners at both sides in the direction indicated by the arrows. Meanwhile, lift up the filter so that it is separated from the fasteners. Pull the filter forward and remove it.

2. Clean filter

Use clear water to wash it or dust catcher to clean it. If the filter is very dirty (such as grease), use warm water (45ºC) dissolved with neutral detergent to clean it, and then put it at the shady place to dry it.



3. Install filter

Insert the buckles (4 places) under the filter into the holes of the device. Make sure that the Filter is correctly installed in the device. Then press the buckles (two places) above the filter into the holes of the device.

⚠ WARNING

- The filter should be cleaned every three months. If there is much dust in the operation environment, clean frequency can be increased.
- After removing the filter, do not touch fins to avoid injury.
- DO NOT use fire or hair dryer to dry the filter to avoid deformation or fire hazard.
- DO NOT clean the healthy filters with water. These filters must be cleaned only with a vacuum cleaner or simply by shaking them on the balcony

NOTE: Checking before use-season

1. Check whether air inlets and air outlets are blocked.
2. Check whether air switch, plug and socket are in good condition.
3. Check whether filter is clean.
4. Check whether mounting bracket for outdoor unit is damaged or corroded. If yes, please contact dealer.
5. Check whether drainage pipe is damaged.

NOTE: Checking after use-season

1. Disconnect power supply.
2. Clean filter and indoor unit's panel.
3. Check whether mounting bracket for outdoor unit is damaged or corroded. If yes, please contact dealer.

Notice for recovery

1. Many packing materials are recyclable materials. Please dispose them in appropriate recycling unit.
2. If you want to dispose the air conditioner, please contact local dealer or consultant service center for the correct disposal method.

Error Code

When air conditioner status is abnormal, temperature indicator on indoor unit will blink to display corresponding error code. Please refer to below list for identification of error code.

Error code	Troubleshooting
U8, H6, H3, E1,E5,E6 ,E8	It can be eliminated after restarting the unit. If not, please contact qualified professionals for service.
C5, F0,F1,F2	Please contact qualified professionals for service.

NOTE:

If there're other error codes, please contact qualified professionals for service.

Checked items before maintenance

General phenomenon analysis
Please check below items before asking for maintenance. If the malfunction still can't be eliminated, please contact local dealer or qualified professionals

Phenomenon	Check items	Solution
Indoor unit can't receive remote controller's signal or remote controller has no action	Whether it's interfered severely (such as static electricity,stable voltage)?	Pull out the plug. Reinsert the plug after about 3min, and then turn on the unit again.
	Whether remote controller is within the signal receiving range?	Signal receiving range is 8m.
	Whether there are obstacles?	Remove obstacles
	Whether remote controller is pointing at the receiving window?	Select proper angle and point the remote controller at the receiving window on indoor unit.
	Is sensitivity of remote controller low; fuzzy display and no display?	Check the batteries. If the power of batteries is too low, please replace them.
	No display when operating remote controller?	Check whether remote controller appears to be damaged. If yes, replace it.
	Fluorescent lamp in room?	Take the remote controller close to indoor unit. Turn off the fluoresent lamp and then try it again.
No air emitted from indoor unit	Air inlet or air outlet of indoor unit is blocked?	Eliminate obstacles.
	Under heating mode, indoor temperature is reached to set temperature?	After reaching to set temperature, indoor unit will stop blowing out air.
	Heating mode is turned on just now?	In order to prevent blowing out cold air, indoor unit will be started after delaying for several minutes, which is a normal phenomenon.

Air conditioner can't operate	Power failure?	Wait until power recovery.
	Is plug loose?	Reinsert the plug.
	Air switch trips off or fuse is burnt out?	Ask professional to replace air switch or fuse.
	Wiring has malfunction?	Ask professional to replace it.
	Unit has restarted immediately after stopping operation?	Wait for 3min, and then turn on the unit again.
	Whether the function setting for remote controller is correct?	Reset the function.
Mist is emitted from indoor unit's air outlet	Indoor temperature and humidity is high?	Because indoor air is cooled rapidly. After a while, indoor temperature and humidity will be decrease and mist will disappear.
Odours are emitted	Whether there's odour source, such as furniture and cigarette, etc	Eliminate the odour source. Clean the filter.
Set temperature can't be adjusted	Your required temperature exceeds the set temperature range?	Set temperature range: 16ºC ~30ºC .
Cooling (heating) effect is not good	Voltage is too low?	Wait until the voltage resumes normal.
	Filter is dirty?	Clean the filter
	Set temperature is in proper range?	Adjust temperature to proper range.
	Door and window are open?	Close door and window.
Air conditioner operates abnormally	Whether there's interference, such as thunder, wireless devices, etc.	Disconnect power, put back power, and then turn on the unit again
"Water flowing" noise	Air conditioner is turned on or turned off just now?	The noise is the sound of refrigerant flowing inside the unit, which is a normal phenomenon.
Cracking noise	Air conditioner is turned on or turned off just now?	This is the sound of friction caused by expansion and/or contraction of panel or other parts due to the change of temperature

Air guide louver can't be closed normally	Whether the air guide louver has been adjusted?	Disconnect the power for 3s and then connect the power; if the problem still exits, disconnect the power, reinstall the air guide louver (install the upper air guide louver and then install the lower air guide louver) and then connect the power.

⚠ WARNING:

- When below phenomenon occurs, please turn off air conditioner and disconnect power immediately, and then contact the dealer or qualified professionals for service.
- Power cord is overheating or damaged.
- There's abnormal sound during operation.
- Air switch trips off frequently.
- Air conditioner gives off burning smell.
- Indoor unit is leaking.
- Do not repair or refi t the air conditioner by yourself.
- If the air conditioner operates under abnormal conditions, it may cause malfunction, electric shock or fire hazard.

Installation Dimension Diagram

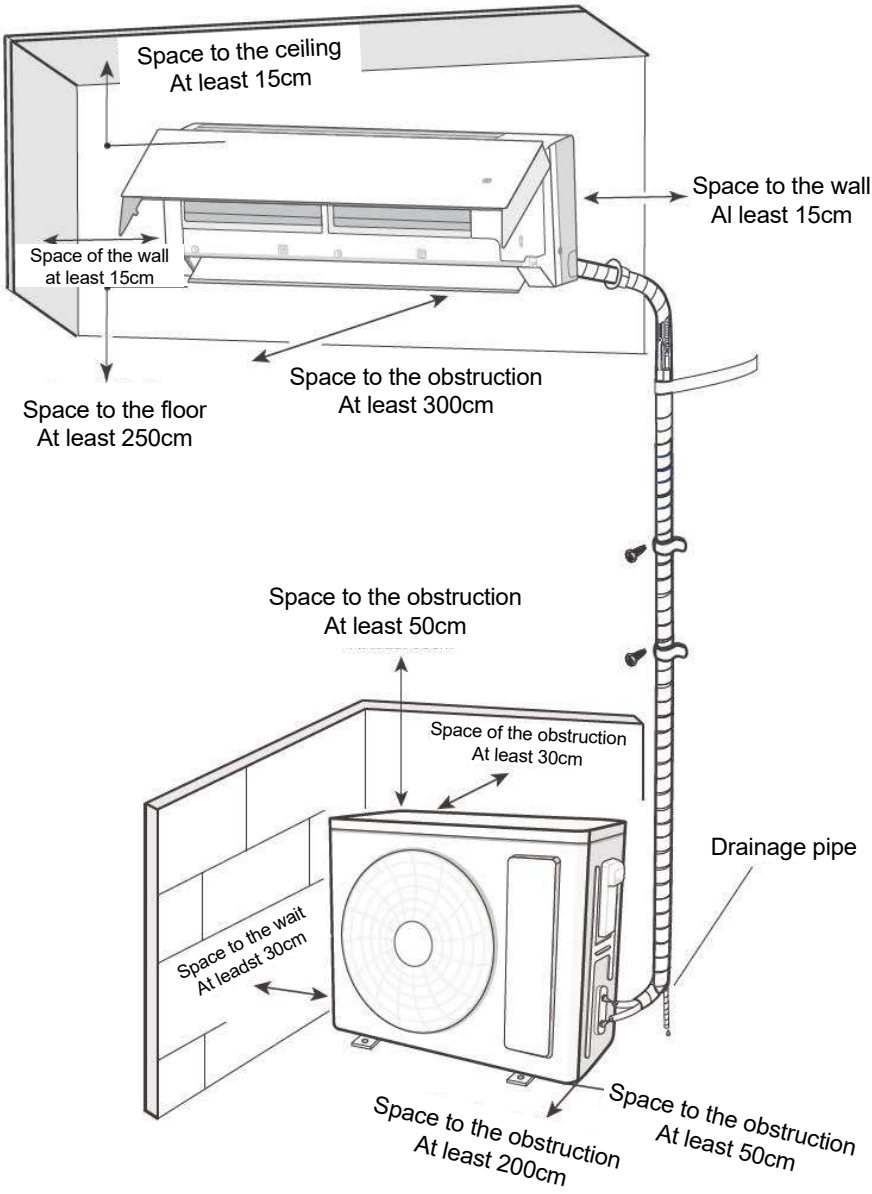

Safety precautions for installing and relocating the unit
To ensure safety, please be mindful of the following precautions.

⚠ WARNING

- When installing or relocating the unit, be sure to keep the refrigerant circuit free from air or substances other than the specified refrigerant. Any presence of air or other foreign substance in the refrigerant circuit will cause system pressure rise or compressor rupture, resulting in injury.
- When installing or moving this unit, do not charge the refrigerant which is not comply with that on the nameplate or unqualified refrigerant. Otherwise, it may cause abnormal operation, wrong action, mechanical malfunction, or even serious safety accident.
- When refrigerant needs to be recovered during relocating or repairing the unit, be sure that the unit is running in cooling mode. Then, fully close the valve at high pressure side (liquid valve). About 30-40 seconds later, fully close the valve at low pressure side (gas valve), immediately stop the unit and disconnect power. Please note that the time for refrigerant recovery should not exceed 1 minute. If refrigerant recovery takes too much time, air may be sucked in and cause pressure rise or compressor rupture, resulting in injury.
- During refrigerant recovery, make sure that liquid valve and gas valve are fully closed and power is disconnected before detaching the connection pipe. If compressor starts running when stop valve is open and connection pipe is not yet connected, air will be sucked in and cause pressure rise or compressor rupture, resulting in injury.
- When installing the unit, make sure that connection pipe is securely connected before the compressor starts running If compressor starts running when stop valve is open and connection pipe is not yet connected, air will be sucked in and cause pressure rise or compressor rupture, resulting in injury.
- Prohibit installing the unit at the place where there may be leaked corrosive gas or flammable gas. If there is leaked gas around the unit, it may cause explosion and other accidents.
- Do not use extension cords for electrical connections. If the electric wire is not long enough, please contact a local service center authorized and ask for a proper electric wire. Poor connections may lead to electric shock or fire.
- Use the specifi ed types of wires for electrical connections between the indoor and outdoor units. Firmly clamp the wires so that their terminals receive no external stresses. Electric wires with insufficient capacity, wrong wire connections and insecure wire terminals may cause electric shock or fire.

Tools for installation

Level meter	Screw driver	Impact drill
Drill head	Pipe expander	Torque wrench
Open-end wrench	Pipe cutter	Leakage detector
Vacuum pump	Pressure meter	Universal meter
Inner hexagon spanner		Measuring tape

NOTE:

- Please contact the local agent for installation.
- Don’t use unqualified power cord.

Selection of installation location

Basic requirement

Installing the unit in the following places may cause malfunction. If it is unavoidable, please consult the local dealer.

1. The place with strong heat sources, vapors, flammable or explosive gas, or volatile objects spread in the air.
2. The place with high-frequency devices (such as welding machine, medical equipment).
3. The place near coast area.
4. The place with oil or fumes in the air.
5, The place with sulfureted gas.
6. Other places with special circumstances.
7. The appliance shall not be installed in the laundry

Indoor unit

1. There should be no obstruction near air inlet and air outlet.
2. Select a location where the condensation water can be dispersed easily and will not affect other people.
3. Select a location which is convenient to connect the outdoor unit and near the power socket.
4. Select a location which is out of reach for children.
5. The location should be able to with stand the weight of indoor unit and won't increase noise and vibration.
6. The appliance must be installed 2.5 m.
7. DO NOT install the indoor unit right above the electric appliance.
8. Please try your best to keep way from-fluorescent lamp

Outdoor unit

1. Select a location where the noise and outflow air emitted by the outdoor unit will not affect neighborhood.
2. The location should be well ventilated and dry, in which the outdoor unit will not be exposed directly to sunlight or strong wind.
3. The location should be able to withstand the weight of outdoor unit.
4. Make sure that the installation follows the requirement of installation dimension diagram.
5. Select a location which is out of reach for children and far away from animals or plants. If it is unavoidable, please add the fence for safety purpose.

Requirements for electric connection

Safety Precaution

1. Must follow the electric safety regulations when installing the unit.
2. circuit and air switch.
3. Make sure the power supply matches with the requirement of air conditioner. Unstable power supply or incorrect wiring may result in electric shock, fire hazard or malfunction. Please install proper power supply cables before using the air conditioner.
4. Properly connect the live wire, neutral wire and grounding wire of power socket.
5. Be sure to cut off the power supply before proceeding any work related to electricity and safety.
6. Do not put through the power before finishing installation.
7. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
8. The temperature of refrigerant circuit will be high, please keep the interconnection cable away from the copper tube.
9. The appliance shall be installed in accordance with national wiring regulations.

Grounding Requirement

1. The air conditioner is the first class electric appliance. It must be properly grounding with specialized grounding device by a professional. Please make sure it is always grounded effectively, otherwise it may cause electric shock.
2. The yellow-green wire in air conditioner is grounding wire, which cannot be used for other purposes.
3. The grounding resistance should comply with national electric safety regulations.
4. The appliance must be positioned so that the plug is accessible.
5. An all-pole disconnection switch having a contact separation of at least 3 mm in all poles should be connected in fixed wiring.

Air switch capacity

Including an air switch with suitable capacity, please note the following table.
Air switch should be included magnet buckle and heating buckle function, it can protect the circuit-short and overload. (Caution: please do not use the fuse only for protect the circuit).

Air-conditioner	Air switch capacity
9K & 12K	10A
18K	16A
24K	25A

Installation of indoor unit

Step one: Choosing installation location
Recommend the installation location and confirm it with client.

Step two: Install wall-mounting frame
1. Hang the wall-mounting frame on the wall; adjust it in horizontal position with the level meter and then point out the screw fixing holes on the wall.
2. Drill the screw fixing holes on the wall with impact drill (the specifications of drill head should be same as the plastic expansion particle) and then fill the plastic expansion particles in the holes.
3. Fix the wall-mounting frame on the wall with tapping screws and then check if the frame is firmly installed by pulling the frame. If the plastic expansion particle is loose, please drill another fixing hole nearby.

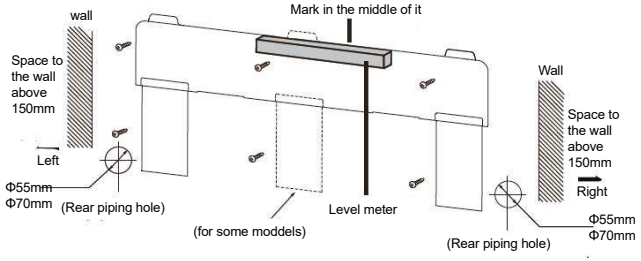

Step three: Open piping hole
1. Choose the position of piping hole according to the direction of outlet pipe. The position of piping hole should be a little lower than the wall-mounted frame, shown as below.

NOTE:
- The wall panel is for illustrative purposes only, please refer to the actual installation.
- Please refer to the actual circumstances for the number of screws and the position of screws.

2. When installation is finished, pull the mounting plate with hand to confirm whether it is fixed tightly. The force distribution for all screws should be uniform.
3. Open a piping hole with the diameter of Φ55 or Φ70 on the selected outlet pipe position. In order to drain smoothly, slant the piping hole on the wall slightly downward to the outdoor side with the gradient of 5-10°.

NOTE:
- Pay attention to dust prevention and take relevant safety measures when opening the hole.
- The plastic expansion particles are not provided and should be bought locally.

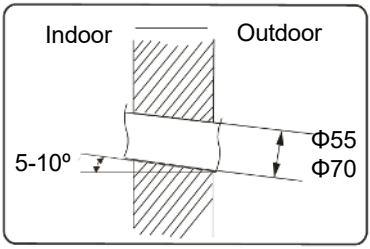

Step four: Outlet pipe

1. The pipe can be led out in the direction of right, rear right, left or rear left.

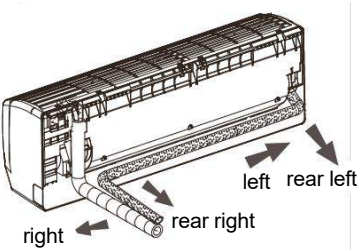

2. When select leading out the pipe from left or right, please cut off the corresponding hole on the bottom-case.

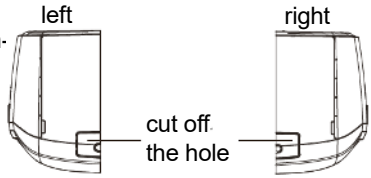

Step five: Connect the pipe of indoor unit

1. Aim the pipe joint at the corresponding Bell mouth.
2. Pretightening the union nut with hand.
3. Adjust the torque force by referring to the following sheet. Place the open-end wrench on the pipe joint and place the torque wrench on the union nut. Tighten the union nut with torque wrench.



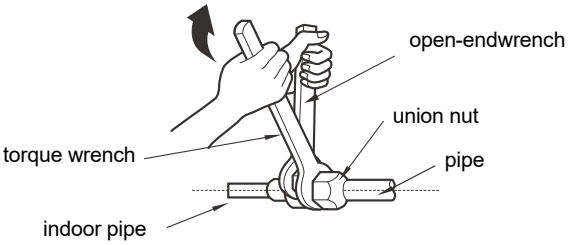

Hex nut diameter	tightening torque (N-m)
1/4”	15~20
3/8”	30~40
1/2”	45~55
5/8”	60~65
3/4”	70~75

4. Wrap the indoor pipe and joint of connection pipe with insulating pipe, and then wrap it with tape.



Step six: Install drain hose

1. Connect the drain hose to the outlet pipe of indoor unit.

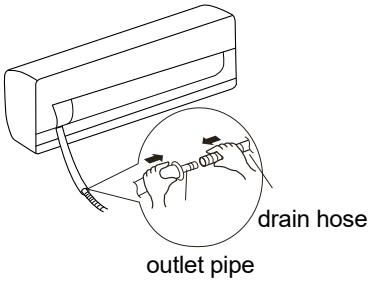

2. Bind the joint with tape.



NOTE:

- Add insulating pipe in the indoor drain hose in order to prevent condensation.
- The plastic expansion particles are not provided.



Step seven: Connect wire of indoor unit

- All wires of indoor unit and outdoor unit should be connected by a professional.
- If the length of power connection wire is insuffi cient, please contact the supplier for a new one. Avoid extending the wire by yourself.
- For the air conditioner with plug, the plug should be reachable after finishing installation.
- For the air conditioner without plug, an air switch must be installed in the line. The air switch should be all-pole parting and the contact parting distance should be more than 3mm.

1. Open the panel, remove the screw on the wiring cover and then take down the cover.



2. Make the power connection wire go through the cable-cross hole at the back of indoor unit and then pull it out from the front side.

3. Remove the wire clip; connect the power connection wire to the wiring terminal ac cording to the color; tighten the screw and then fix the power connection wire with wire clip.

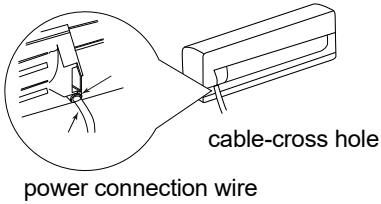

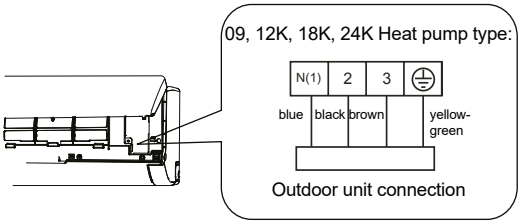

NOTE:
The wiring board is for reference only, please refer to the actual one.

4. Put wiring cover back and then tighten the screw.
5. Close the panel.

Step eight: Bind up pipe

1. Bind up the connection pipe, power cord and drain hose with the band.
2. Reserve a certain length of drain hose and power cord for installation when binding them. When binding to a certain degree, separate the indoor power and then separate the drain hose.
3. Bind them evenly.
4. The liquid pipe and gas pipe should be bound separately at the end.

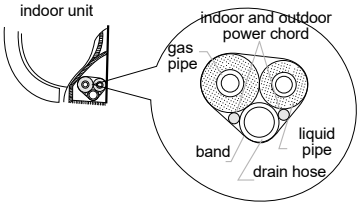

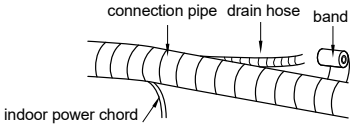

NOTE:

- The power cord and control wire cannot be crossed or winding.
- The drain hose should be bound at the bottom.

Step nine: Hang the indoor unit

1. Put the bound pipes in the wall pipe and then make them pass through the wall hole.
2. Hang the indoor unit on the wall-mounting frame.
3. Stuff the gap between pipes and wall hole with sealing gum.
4. Fix the wall pipe.
5. Check if the indoor unit is installed firmly and closed to the wall.

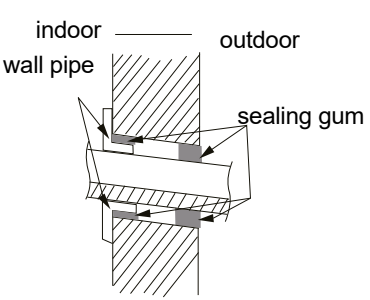

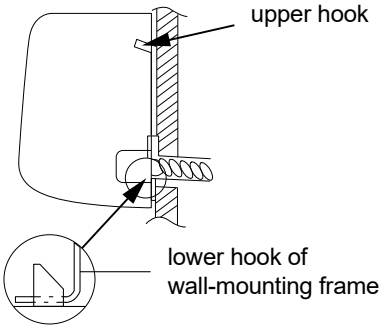

NOTE:

- Do not bend the drain hose too excessively in order to prevent blocking.

Configuration of Connection Pipe

1. Standard length of connection pipe: 5m, 7.5m,8m.
2. Min. length of connection pipe. For the unit with standard connection pipe of 5m, there is no limitation for the min length of connection pipe. For the unit with standard connection pipe of 7.5m and 8m, the min length of connection pipe is 3m.
3. Max. length of connection pipe is shown as below.

Max. length of connection pipe

Cooling Capacity	Max length of connection pipe
5000 (BTU/h) (1465W) 7000 (BTU/h) (2051W) 9000 (BTU/h) (2637W)	15
12000 (BTU/h) (3516W)	20
18000 (BTU/h) (5274W) 24000 (BTU/h) (7032W)	25
28000 (BTU/h) (5274W) 36000 (BTU/h) (10548W) 42000 (BTU/h) (12306W) 48000 (BTU/h) (14064W)	30

4. The additional refrigerant oil and refrigerant charging required after prolonging connection pipe. After the length of connection pipe is prolonged for 10 m at the basis of standard length, you should add 5 ml of refrigerant oil for each additional 5 m of connection pipe. The calculation method of additional refrigerant charging amount (on the basis of liquid pipe):

1. Additional refrigerant charging amount = prolonged length of liquid pipe x additional refrigerant charging amount per meter.
2. Basing on the length of standard pipe, add refrigerant according to the requirement as shown in the table. The additional refrigerant charging amount per meter is different according to the diameter of liquid pipe. See the following sheet.

Additional refrigerant charging amount for R32

Diameter of connection pipe mm		Indoor unit throttle	Outdoor unit throttle	
Liquid pipe	Gas pipe	Cooling only, cooling and heating (g / m)	Cooling only (g / m)	Cooling and heating (g / m)
Φ 6	Φ 9.5 or Φ 12	16	12	16
Φ 6 or ф 9.5	Φ 16 or Φ 19	40	12	40
Φ 12	Φ 19 or Φ 22.2	80	24	96
Φ 16	Φ 25.4 or Φ 31.8	136	48	96
Φ 19	-	200	200	200
Φ 22.2	-	280	280	280

Note:
The additional refrigerant charging amount in Sheet 2 is recommended value, not compulsory.

Safety operation of flammable refrigerant

Qualification requirement for installation and maintenance man

- All the work men who are engaging in the refrigeration system should bear the valid certification awarded by the authoritative organization and the qualifcation for dealing with the refrigeration system recognized by this industry. If it needs other technician to maintain and repair the appliance, they should be supervised by the person who bears the qualification for using the flammable refrigerant.
- It can only be repaired by the method suggested by the equipment's manufacturer.

Installation Notes

- The air conditioner is not allowed to use in a room that has running fire (such as fire source, working coal gas ware, operating heater).
- It is not allowed to drill hole or burn the connection pipe.
- The air conditioner must be installed in a room that is larger than the minimum room area. The minimum room area is shown on the nameplate or following table.
- Leak test is a must after installation.

Table a - Minimum room area (m²)

Charge amount (kg)	location floor	window mounted	wall mounted	ceiling mounted
≤1.2	/	/	/	/
1.3	14.5	5.2	1.6	1.1
1.4	16.8	6.1	1.9	1.3
1.5	19.3	7	2.1	1.4
1.6	22	7.9	2.4	1.6
1.7	24.8	8.9	2.8	1.8
1.8	27.8	10	3.1	2.1
1.9	31	11.2	3.4	2.3
2	34.3	12.4	3.8	2.6
2.1	37.8	13.6	4.2	2.8
2.2	41.5	15	4.6	3.1
2.3	45.4	16.3	5	3.4
2.4	49.4	17.8	5.5	3.7
2.5	53.6	19.3	6	4

Maintenance Notes

• Check whether the maintenance area or the room area meet the requirement of the nameplate.
- It is only allowed to be operated in the rooms that meet the requirement ofthe nameplate.
• Check whether the maintenance area is well-ventilated.
- The continuous ventilation status should be kept during the operation process.
• Check whether there is fire source or potential fire source in the maintenance area.
- The naked flame is prohibited in the maintenance area; and the “no smo king” warning board should be hanged.
• Check whether the appliance mark is in good condition.
- Replace the vague or damaged warning mark.

Welding

• If you should cut or weld the refrigerant system pipes in the process of maintaining, please follow the steps as below:
  a. Shut down the unit and cut power supply.
  b. Eliminate the refrigerant.
  c. Vacuuming
  d. Clean it with N2 gas
  e. Cutting or welding
  f. Carry back to the service spot for welding

The refrigerant should be recycled into the specialized storage tank.
Make sure that there is not any naked flame near the outlet of the vacuum pump and it is well-ventilated.

Filling the Refrigerant

- Use the refrigerant filling appliances specialized for R32. Make sure that different kinds of refrigerant will not contaminate with each other.
- The refrigerant tank should be kept upright at the time of filling refrigerant.
- Stick the label on the system after filling is finished (or have not finished).
- DO NOT overfilling.
- After filling is finished, please do the leakage detection before test running; Another time of leak detection should be done when it is removed.

Safety Instructions for Transportation and Storage

- Please use the flammable gas detector to check before unload and open the container.
- No fire source and smoking.
- According to the local rules and laws.

Installation of Outdoor Unit

step one: Fix the support of outdoor unit
(select it according to the actual installation situation)

1. Select installation location according to the house structure.
2. Fix the support of outdoor unit on the selected location with expansion screws.

NOTE:

- Take sufficient protective measures when installing outdoor unit.
- Make sure the support can withstand at least four times of the unit weight.
- The outdoor unit should be installed at least 3 cm above the floor in order to install drain joint.
- For the unit with cooling capacity of 2300W~5000W, 6 expansion screws are needed; for the unit with cooling capacity of 6000W ~8000W, 8 expansion screws are needed; for the unit with cooling capacity of 10000W ~16000W, 10 expansion screws are needed.



at least 3 cm above the floor

Step two: Install drain joint

1. Connect the outdoor drain joint into the hole on the chas sis, as shown in the picture below.
2. Connect the drain hose into the drain vent.



NOTE:

As for the shape of drainage joint, please refer to the current product. Do not install the drainage joint in the severe cold area. Otherwise, it will be frosted and then cause malfunction.

Step three: Fix outdoor unit

1. Place the outdoor unit on the support.
2. Fix the foot holes of outdoor unit with bolts.



Step four: Connect indoor and outdoor pipes

1. Remove the screw on the right handle of outdoor unit and then remove the handle.



NOTE:

- When there're multiple cables passing through it, the cross-hole of handle should be knocked off and eliminate the sharp burrs for avoid damaging the cables.
- Only applicable for some models.

2. Remove the screw cap of valve and aim the pipe joint at the bellmouth of pipe.

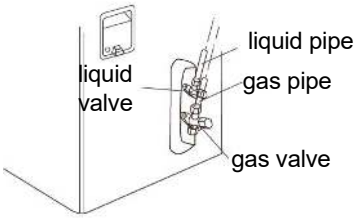

3. Pretightening the union nut with hand.



4. Tighten the union nut with torque wrench by referring to the sheet below.

Hex nut diameter	Tightening torque (N-m)
1/4"	15~20
3/8"	30~40
1/2"	45~55
5/8"	60~65
3/4"	70~75

Step five: Connect outdoor electric wire

1. Remove the wire clip; connect the power connection wire and signal controlwire (only for cooling and heating unit) to the wiring terminal according to the color; fix them with screws.

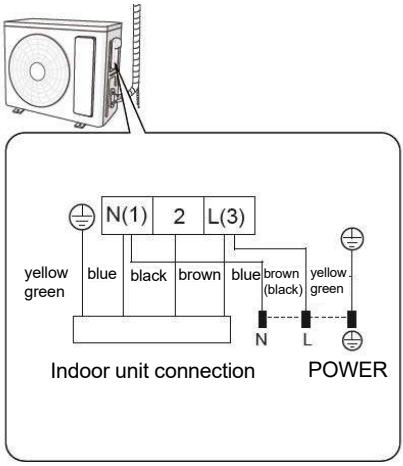

NOTE:
The wiring board is for reference only. Please refer to the actual one.

2. Fix the power connection wire and signal control wire with wire clip (only for cooling and heating unit).

NOTE:
- After tightening the screw, pull the power cord slightly to check if it is firm.
- Never cut the power connection wire to prolong or shorten the distance.

Step six: Neaten the pipes
1. The pipes should be placed along the wall, bent reasonably and hidden possibly. Min. semi diame ter of bending the pipe is 10 cm.
2. If the outdoor unit is higher than the wall hole, you must set a U-shaped curve in the pipe before pipe goes into the room, in order to prevent rain from getting into the room.

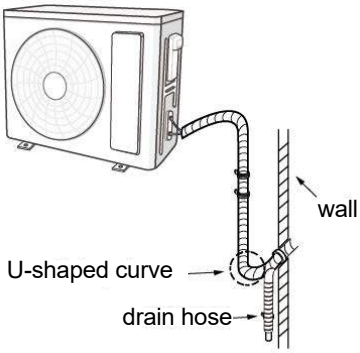

NOTE:
- The trough-wall height of drain hose should be higher than the outlet pipe hole of indoor unit.
- The water outlet cannot be placed in water in order to drain smoothly.
- Slant the drain hose slightly downwards. The drain hose cannot be curved, raised and fluctuant etc.

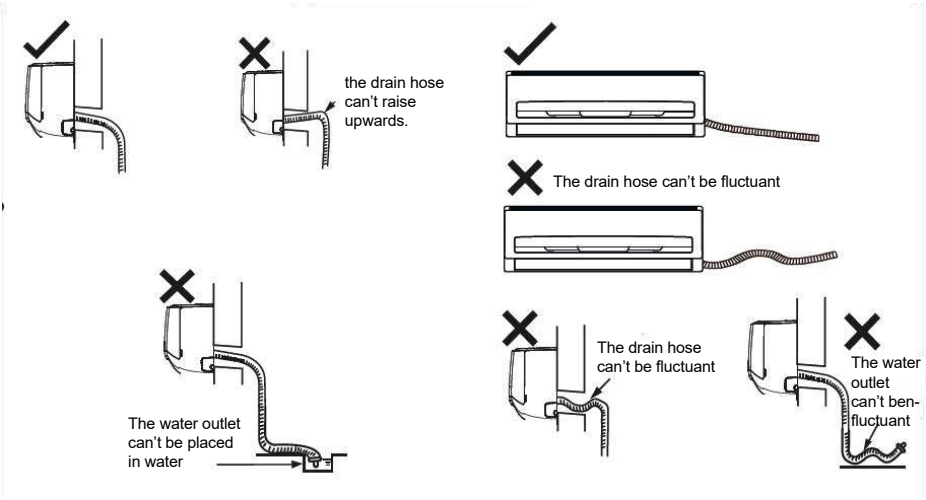

Test and operation

Use vacuum pump

1. Remove the valve caps on the liquid valve and gas valve and the nut of refrigerant charging vent.
2. Connect the charginghose of piezometer to therefrigerant charging vent of gas valve and then connect the other charging hose to the vacuum pump.
3. Open the piezometer completely and operate for 10-15 minutes to check if the pressure of piezometer remains in -0.1MPa.
4. Close the vacuum pump and maintain this status for 1-2 minutes to check if the pressure of of piezometer remains in -0.1MPa. If the pressure decreases, there may be leakage.
5. Remove the piezometer, open the valve core of liquid valve and gas valve completely with inner hexagon spanner.
6. Tighten the screw caps of valves and refrigerant charging vent.
7. Reinstall the handle. Test and operation.

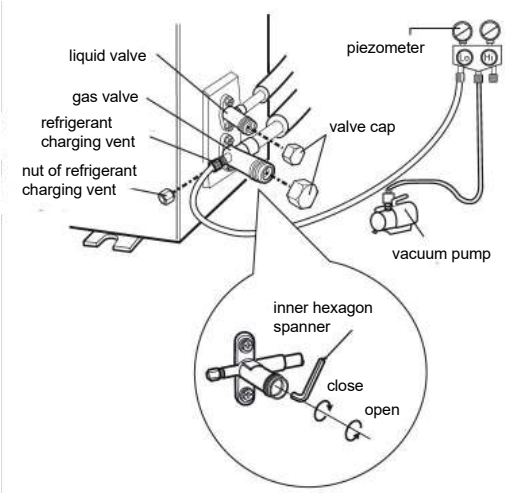

Leakage Detection

1. With leakage detector: Check if there is leakage with leakage detector.
2. With soap water:If leakage detector is not available, please use soap water for leakagede tection. Apply soap water at the suspected position and keep the soapwater for more than minutes. If there are air bubbles coming out of this position, there is a leakage.

Check After Installation

- Check according to the following requirement after finishing installation.

Items to be checked	Possible malfunction
Has the unit been installed rirmly?	The unit may drop, shake or emit noise.
Have you done the refrigerant leakage test?	It may cause insuf cient cooling (heating) capacity
Is heat insulation of pipeline suf cient?	It may cause condensation and water dripping.
Is water drained well?	It may cause condensation and water dripping.
Is the voltage of power supply according to the voltage marked on the nameplate?	It may cause malfunction or damaging the parts.
Is electric wiring and pipeline installed correctly?	It may cause malfunction or damaging the parts
Is the unit grounded securely?	It may cause electric leakage.
Does the power cord follow the specicatification?	It may cause malfunction or damaging the parts.
Is there any obstruction in the air inlet and outlet?	It may cause insuf cient cooling (heating) capacity.

The dust and sundries caused during installation are removed?	It may cause malfunction or damaging the parts
The gas valve and liquid valve of connection pipe are open completely?	It may cause insuf cient cooling (heating) capacity.
Is the inlet and outlet of piping hole been covered?	It may cause insufficient cooling (heating) capacity or waster electricity

Test Operation

1. Preparation of test operation
- Specify the important notes for air conditioner to the client.
- The client approves the air conditioner.

2. Method of test operation
- Put through the power, press ON/OFF button on the remote controller to start operation.
- Press MODE button to select AUTO, COOL, DRY, FAN and HEAT to check whether the operati on is normal or not.
- If the ambient temperature is lower than 16ºC, the air conditioner cannot start cooling.

Pipe expanding method

NOTE:
Improper pipe expanding is the main cause of refrigerant leakage. Please expand the pipe according to the following steps:

A: Cut the pipe
- Confirm the pipe length accodin to the distance of indoor unit and outdoor unit.
- Cut the required pipe with pipecutter.

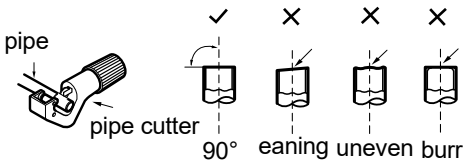

B. Remove the burrs
- Remove the burrs with shaper and prevent the burrs from getting into the pipe.

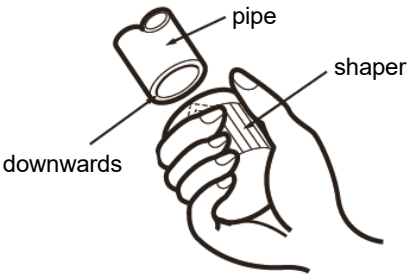

C. Put on suitable insulating pipe.

D. Put on the unit nut.

- Remove the union nut on the indoor connection pipe and outdoor valve; install the union nut on the pipe.

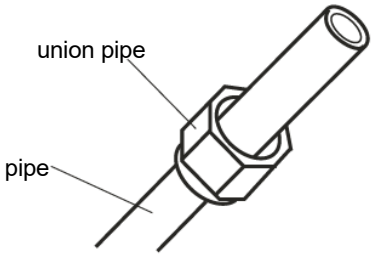

E: Expand the port

- Expand the port with expander.

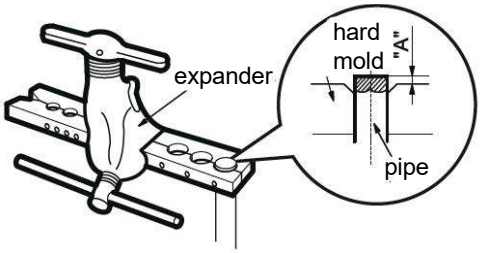

NOTE:

- «A» is different according to the diameter, please refer to the sheet below:

Outer diameter (mm)	A (mm) Maximum	A (mm) Minimum
Φ 6 - 6.35 (1/4”)	1.3	0.7
Φ 9 - 9.52 (3/8”)	1.6	1.0
Φ 12 - 12.7 (1/2”)	1.8	1.0
Φ 15.8 - 16 (5/8”)	2.4	2.2

F: Inspection

- Check the quality of expanding port. If there is any blemish, ex pand the port again according to the steps above.

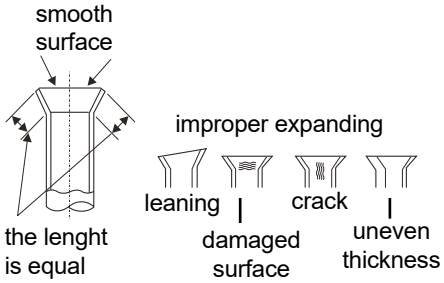

Specialist’s Manual

- **Repair to intrinsically safe components**

Do not apply any permanent inductive or capacitance loads to the circuit without ensuring that this will not exceed the permissible voltage and current permitted for the equipment in use. Intrinsically safe components are the only types that can be worked on while live in the pr sence of a flammable atmosphere. The test apparatus shall be at the correct rating. Replace components only with parts specifi ed by the manufacturer. Other parts may result in the ignition of refrigerant in the atmosphere from a leak.

- **Cabling**

Check that cabling will not be subject to wear, corrosion, excessive pressure, vibration, sharp edges or any other adverse environmental effects. The check shall also take into account the effects of aging or continual vibration from sources such as compressors or fans.

- **Detection of flammable refrigerants**

Under no circumstances shall potential sources of ignition be used in the searching for or detection of refrigerant leaks. A halide torch (or any other detector using a naked fl ame) shall not be used.

- **Leak detection methods**

Leak detection fluids are suitable for use with most refrigerants but the use of detergents containing chlorine shall be avoided as the chlorine may react with the refrigerant and corrode the copper pipe-work.

- **Decommissioning**

Before carrying out this procedure, it is essential that the technician is completely familiar with the equipment and all its detail. It is recommended good practice that all refrigerants are recovered safely. Prior to the task being carried out, an oil and refrigerant sample shall be taken in case analysis is required prior to re-use of reclaimed refrigerant. It is essential that electrical power is available before the task is commenced.

a) Become familiar with the equipment and its operation.
b) Isolate system electrically.
c) Before attempting the procedure, ensure that:
   – mechanical handling equipment is available, if required, for handling refrigerant cylinders;
   – all personal protective equipment is available and being used correctly;
   – the recovery process is supervised at all times by a competent person;
   – recovery equipment and cylinders conform to the appropriate standards.
d) Pump down refrigerant system, if possible.
e) If a vacuum is not possible, make a manifold so that refrigerant can be removed from various parts of the system.
f) Make sure that cylinder is situated on the scales before recovery takes place.
g) Start the recovery machine and operate in accordance with manufacturer's instructions.
h) Do not overfi ll cylinders. (No more than 80% volume liquid charge).
i) Do not exceed the maximum working pressure of the cylinder, even temporarily.
j) When the cylinders have been fi lled correctly and the process completed, make sure that the cylinders and the equipment are removed from site promptly and all isolation valves on the equipment are closed off.
k) Recovered refrigerant shall not be charged into another refrigeration system unless it has been cleaned and checked.

- **Labelling**

Equipment shall be labelled stating that it has been de-commissioned and emptied of refrigerant. The label shall be dated and signed. For appliances containing flammable refrigerants, ensure that there are labels on the equipment stating the equipment contains flammable refrigerant.

- **Recovery**

When removing refrigerant from a system, either for servicing or decommissioning, it is recommended good practice that all refrigerants are removed safely. When transferring refrigerant into cylinders, ensure that only appropriate refrigerant recovery cylinders are employed. Ensure that the correct number of cylinders for holding the total system charge are available. All cylinders to be used are designated for the recovered refrigerant and labelled for that refrigerant (i.e. special cylinders for the recovery of refrigerant). Cylinders shall be complete with pressure-relief valve and associated shut-off valves in good working order. Empty recovery cylinders are evacuated and, if possible, cooled before recovery occurs. The recovery equipment shall be in good working order with a set of instructions concerning the equipment that is at hand and shall be suitable for the recovery of all appropriate refrigerants including, when applicable, flammable refrigerants. In addition, a set of calibrated weighing scales shall be available and in good working order. Hoses shall be complete with leak-free disconnect couplings and in good condition. Before using the recovery machine, check that it is in satisfactory working order, has been properly maintained and that any associated electrical components are sealed to prevent ignition in the event of a refrigerant release. Consult manufacturer if in doubt. The recovered refrigerant shall be returned to the refrigerant supplier in the correct recovery cylinder, and the relevant waste transfer note arranged. Do not mix refrigerants in recovery units and especially not in cylinders. If compressors or compressor oils are to be removed, ensure that they have been evacuated to an acceptable level to make certain that flammable refrigerant does not remain within the lubricant. The evacuation process shall be carried out prior to returning the compressor to the suppliers. Only electric heating to the compressor body shall be employed to accelerate this process. When oil is drained from a system, it shall be carried out safely.

Απαγορεύεται η ανατύπωση ή αναπαραγωγή ολόκληρου ή μέρους αυτού του εγχειριδίου με οποιοδήποτε τρόπο, χωρίς την έγγραφη άδεια της Γ.Ε.ΔΗΜΗΤΡΙΟΥ Α.Ε.Ε. It is prohibited to reprint or reproduction of all or part of this manual in any manner without written permission of TOYOTOMI CO., LTD
È vietato ristampare o riprodurre tutto o parte di questo manuale in qualsiasi modo senza il permesso scritto di TOYOTOMI ITALIA S.R.L.
Quedan prohibidas la reimpresión y reproducción de este manual o partes del mismo sin permiso previo por escrito de TOYOTOMI EUROPE SALES SPAIN S.A
É proibida a reimpressão ou reprodução total ou parcial deste manual, de qualquer forma, sem autorização escrita da TOYOTOMI CO., LTD

ΕΠΙΣΗΜΗ ΑΝΤΙΠΡΟΣΩΠΕΙΑ ΕΛΛΑΔΑΣ
Γ.Ε.ΔΗΜΗΤΡΙΟΥ Α.Ε.Ε.
ΛΕΩΦ. ΚΗΦΙΣΟΥ 6, ΑΙΓΑΛΕΩ, ΑΘΗΝΑ
Τηλ.: +30 210 5386400
Fax: +30 210 5913664
http://www.toyotomi.gr

SERVICE / ΑΝΤΑΛΛΑΚΤΙΚΑ
Γ.Ε.ΔΗΜΗΤΡΙΟΥ Α.Ε.Ε.
ΛΕΩΦ. ΚΗΦΙΣΟΥ 6, ΑΙΓΑΛΕΩ, ΑΘΗΝΑ
Τηλ.: +30 210 5386490
Fax: +30 210 5313349

OFFICIAL REPRESENTATIVE ITALY
TOYOTOMI ITALIA S.R.L.
VIA T. EDISON, 11
20875 BURAGO DI MOLGORA (MB)
Tel: +39 039 6080392
Fax: +39 039 6080316
http://www.toyotomi.it

OFFICIAL REPRESENTATIVE NETHERLANDS
TOYOTOMI EUROPE SALES B.V.
HUYGENSWEG 10, 5466 AN VEGHEL
Tel: +31 (0)413 82 02 95
http://www.toyotomi.eu

REPRESENTANTE OFICIAL ESPANA
TOYOTOMI EUROPE SALES SPAIN S.A.
CALLE TRIGO, 9 BAJO 2, 28914 LEGANÉS (MADRID)
Tel: +34 91 6895583
Fax: +34 91 6895584
http://www.toyotomi.es

OFFICIAL REPRESENTATIVE PORTUGAL
TOYOTOMI EUROPE SALES B.V.
HUYGENSWEG 10, 5466 AN VEGHEL, THE NETHERLANDS
Tel. + 351 96 756 54 00
commercial@ toyotomi.eu
www.toyotomi.pt

Το προϊόν κατασκευάζεται στην Κίνα
This product is made in China
Questo prodotto è fabbricato in Cina
Este producto ha sido fabricado en China
Este produto é fabricado na China

avg 202306-v1